


Hydropalat® SL 3683

Highly effective slip and anti-blocking agent for water-based paint, coatings and ink systems

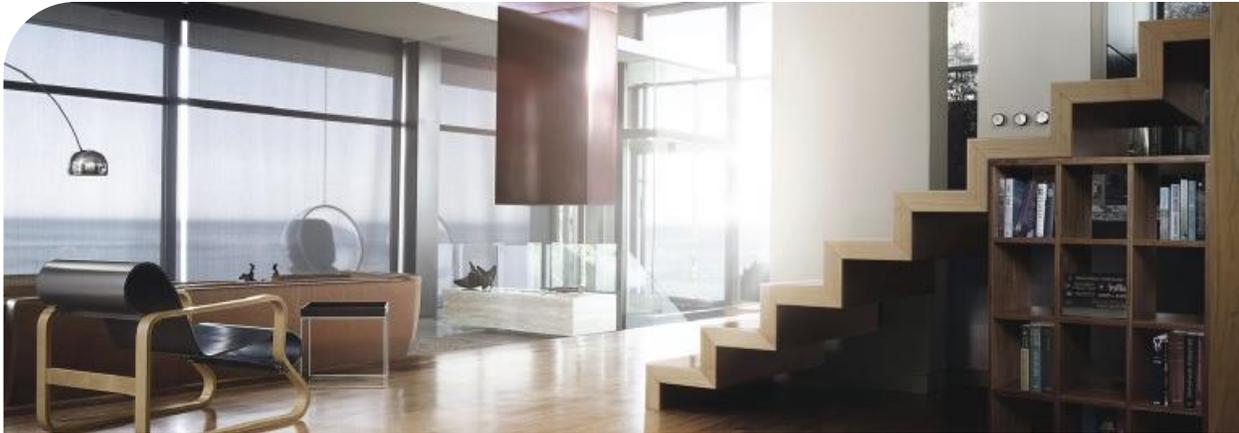

Application:

Hydropalat® SL 3683 is an aqueous emulsion of an ultra-high molecular weight silicone providing excellent slip, scratch and mar resistance and anti-blocking properties.

Additionally, Hydropalat® SL 3683 is recommended for Furniture and Flooring Coatings, Architectural Coatings and the Printing and Packaging Industry.

Sustainability Highlights:

- Tin-free
- Free of Ethyl-benzene
- Low D4 content

Performance Highlights:

- Excellent slip and mar resistance
- Excellent anti-blocking properties
- Broad compatibility with different binder systems
- Suitable for both glossy and matt pigmented systems as well as for clear coats (wood coatings)

Characteristic Values:

	Hydropalat® SL 3683
Appearance:	Clear to slightly hazy, slightly yellowish liquid
Density at 20°C [g/cm ³]:	~ 0.98 g/cm ³
Solid content [%]:	~ 65%
Viscosity [mPa·s]:	~ 3000 mPa·s

